



Preparation and assembly

Before you begin with the assembly, reserve yourself enough time and proceed step by step according to the instructions. As a first step, it makes sense to allocate all the supplied parts to the corresponding areas in the car.

Your cover does not fit properly?

The edges of the original seat must match the side seams of the cover. If this is not the case tighten them. The final adjustment to the shape of your backrest happens after you have used the cover for a few days.

Side panels of the sitting part do not fit in length?

Due to the trim on the front seats, some of the side sections of the seat are of different lengths. So, if the side sections appear to be too long or short, please check whether you have mixed up the covers for the sitting part and the backrest.

CAUTION: DO NOT ATTACH THE RUBBER STRAPS TO EXISTING CABLES IN THE CAR!

ASSEMBLY INSTRUCTIONS

1. Mount the seat part

1.1 Place the seat part of the cover on the seat surface of your car seat and smooth it out. Fix the rubber loops with hooks under the seat.

1.2 Do not stretch the rubber loops at the back of the seat towards the centre of the seat, but to the outside or back of the seat.

2. Mount the headrest covers

2.1 Remove the headrest from the original seat (if possible). The attachment of the head restraint varies from vehicle to vehicle.

2.2 Roll up the cover like a sock and put it over the headrest. Due to the non-elastic materials the cover may be a little harder to put on. It is therefore advisable to pinch the headrest between the thighs or to have a second person help you.

2.3 After covering the headrest, close the zip system on the underside.

ATTENTION


Do not reinstall the headrest until after point 3 (upholstering the backrest)!


3. Mount the backrest cover

3.1 Roll up the backrest of your new seat cover like a sock (**Fig. 2.2**) and cover the backrest of the original seat. If your new seat cover is laminated with foam, it will be a little more difficult to install the cover.

3.2 Pull the flap through between the seat and the backrest and fix it with the help of the hook and loop fastener on the back of the front seat.

3.3 Make sure that all the cut-outs are in the right place. All necessary openings, e.g. for the head restraints or the side lever, are already pre-punched and fit perfectly. Place the cut-outs for the headrest under the plastic holder. Now the headrests can be refitted.

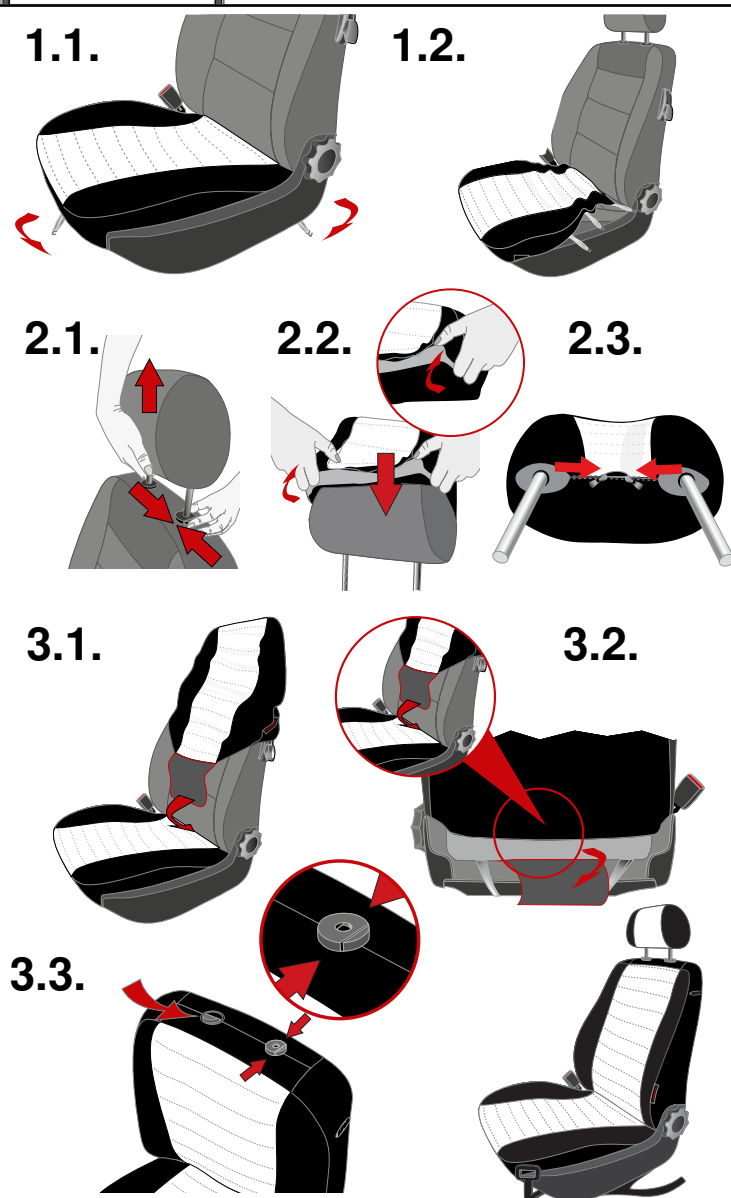

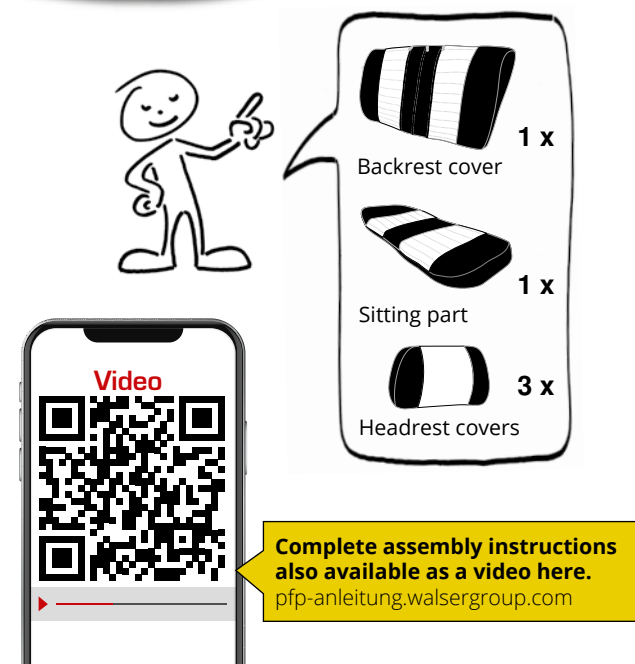

Preparation and assembly

Before you begin with the assembly, reserve yourself enough time and proceed step by step according to the instructions. As a first step, it makes sense to allocate all the supplied parts to the corresponding areas in the car.

Your cover does not fit properly?

The edges of the rear seat must match the side seams of the cover. If this is not the case, tighten them. The final adjustment to the shape of your back seat is done after you have used the cover for a few days.

CAUTION: DO NOT ATTACH THE RUBBER STRAPS TO EXISTING CABLES IN THE CAR!

ASSEMBLY INSTRUCTIONS

1. Mount the sitting part of the rear seat

1.1 Place the seat part of the cover on the seat of your back-seat and smooth it out. Then attach the cover to the underside and back of the rear seat using rubber loops with hooks

1.2 Do not pull the rubber loops in the rear part of the seat to the centre of the seat, but to the outside or back. The seat cover is made in such a way that it disappears under the blind on the front side of the rear seat.

2. Mount the headrest covers

2.1 Remove the headrest from the original seat (if possible). The mounting of the headrest varies from vehicle to vehicle.

2.2 Roll up the cover like a sock and put it over the headrest. Due to the non-elastic materials the cover may be a little harder to put on. It is therefore advisable to pinch the headrest between the thighs or to have a second person help you.

2.3 After covering the headrest, close the zip system on the underside of the headrest.

ATTENTION Reinstall the headrest only after point 3 (upholstering the backrest of the rear seat bench)!

3. Mount the rear seat backrest cover

3.1 Roll up the backrest part of your new seat cover like a sock (fig.2.2) and cover the backrest of the original seat. If your new seat cover is laminated with foam, it will be a little more difficult to cover the original seat.

3.2 Pull through the rubber bands between the seat and the backrest and fix them with the hooks on the back of the backrest of the rear seat bench

3.3 Make sure that all the recesses are in the right place. All the necessary openings, e.g. for the headrests are already pre-cut and fit perfectly. Slide the cut-outs for the head restraint under the plastic holder. The head restraints can now be reinstalled.

